




CLIMATIC TEST CHAMBER FOR DRIVING MIRRORS

MODEL, CCK-40/588e

GENERAL:

A vehicle's **driving mirrors** can range in size from the smallest in a utility vehicle to the new larger mirrors in a van or truck. Moreover, their vertical geometry makes it difficult for them to fit into a vehicle position in a conventional climatic chamber. If we add to this the fact that laboratories have limited space for the chambers, then the design has to be well thought out.

The **CCK-40/588e** test chamber has been developed to meet all customer requirements: tight budget, limited space and a wide range of sample sizes. A model that meets the most stringent automotive standards and fits the space available for the chamber in the laboratory.

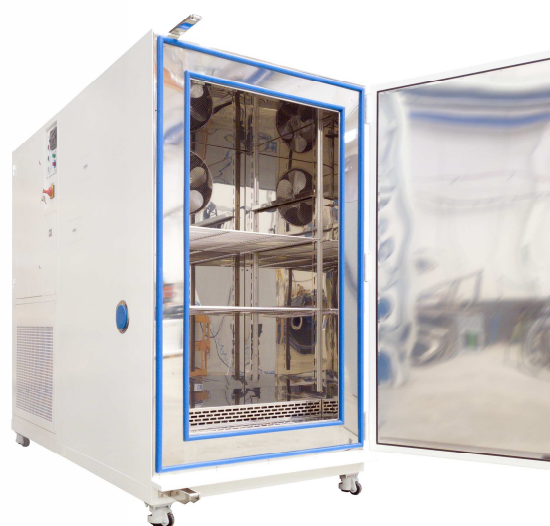

DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37

08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com



TECHNICAL FEATURES:

- Volume: 588 liters.
- Internal dimensions: 1.200 x 700 x 700 mm (H x W x D).
- External dimensions: 1.600 x 1.010 x 2.167 mm (H x W x D).
- Temperature range: from $-40\text{ }^{\circ}\text{C}$ to $+150\text{ }^{\circ}\text{C}$.
- Relative humidity range: from 10 % to 98 % R.H.
- Temperature change rates acc. IEC 60068-3-5:
 - $2,5\text{ }^{\circ}\text{C}/\text{min}$ cooling.
 - $4,0\text{ }^{\circ}\text{C}/\text{min}$ heating.
- Chamber designed to comply with the standard VW PV 1200.
- Interior and exterior made in stainless steel.
- Pivoting single leaf door allowing access to the entire work area. Blind door.
- 2 Stainless steel shelves. Max. load 40 kg.
- Access port: 80 mm \varnothing .
- Control by microprocessor Eurotherm with remote control software, placed in a easy access zone.
- Height-adjustable wheels.
- Air cooled condenser.
- Service area placed in a easy access zone according with the space that the customer has for the chamber.
- CE mark.



DYCOMETAL EQUIPOS DE C.C., S.L.

C/ De la Ciència, 35-37

08840 - Viladecans (Barcelona) - SPAIN

T: (34) 936 526 610 F: (34) 936 407 607

www.dycometal.com

